

## ARB Single Compressor Mount - Installation Instructions

Tools required for installation:  
7/32" allen wrench, Two 5/8" wrenches and optional rivet nut installation tool

### Step 1


Install the ARB Single compressor to the mount using the ARB supplied mounting bolts. The ARB compressor will have instructions on positioning the compressor to your desired setting.



### Step 2

Install the provided spring-backed track nuts (A) or optional t-slot nuts (B) into the Trail Rail. The mount can only be mounted on the right side of bed.

Note: The area that is larger to insert the t-slot nuts is located on the cab end of the rail.

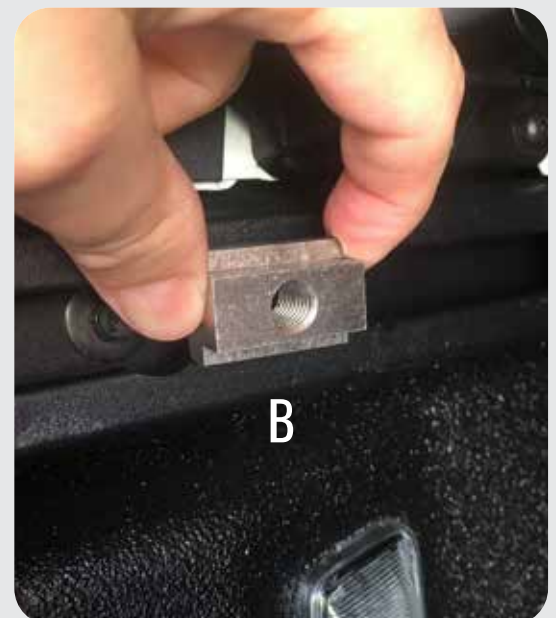

## Step 3

Install the ARB Single compressor and mount to the rails using the two 3/8" button head screws and washers provided using a 7/32" allen wrench. (Red Circles)

Fasten the bottom of mount using the included 7/16" bolt and washers. There is an optional rivet nut included that will fit the factory hole in the bed. If not using the rivet nut, there are two washers and a bolt also included to both the mount through the bed. (Green Circle)

Optional ARB switch plate (Blue Circle) can be mounted to the compressor. (Sold Separately)



Optional rivet nut installation that will fit the factory hole in the bed (Green Circle). Note that the 7/16" bolt will feel loose when installing but fastens the mount very well.



Please let us know if you have any questions - [eight13design@gmail.com](mailto:eight13design@gmail.com)