
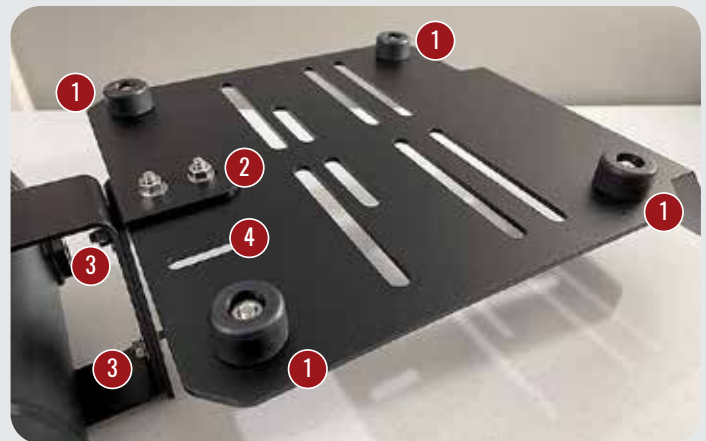


ARB / ViAir Rear Floor Mount Compressor Plate - Jeep Gladiator

Tools required for installation:
4mm Allen Wrench, 10mm Wrench, 10mm Socket

Organize Your Hardware:

You should have four groups of hardware, refer to the photo to organize your hardware for installation of the floor mount and optional tank bracket. The corresponding numbers show what hardware is used in each location.

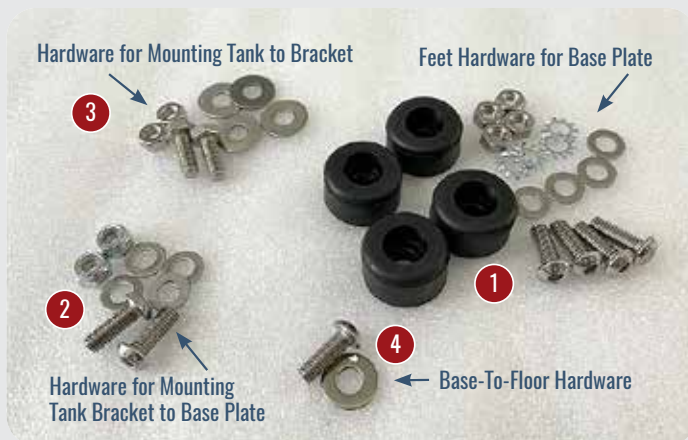

Mounting the Compressor Base:

There are three installation points for the floor mount (**red circles below**). Removal of the Mopar hardware box is required. You will reuse the hardware to install the compressor mount. The floor mount was designed to work with or without most seat delete setups whether they are commercial or DIY. If you are mounting the base inside of a seat delete, it is best to mount your compressor and tank to the floor, complete your wiring, then install the seat delete. The wiring is easier to do if you install the seat delete last. The floor mount is designed to work with ViAir and ARB Twin/Single compressors.

